

SUBMITTAL DATA SHEET



Series Name: Regular Heat AHU Series
Model Number: AH30H52SZMI/SZ30H52SZMO

Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPEINDOOR SPECIFICATIONCIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		988.8 / 894.7 / 806.4 / 712.2 / N/A
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		N/A/44/41/26/N/A
Dimension (W×D×H)	inch	21.02 x 21.02 x 49.02
	mm	534.0×534.0×1245.0
Package (W×D×H)	inch	26.57 x 24.41 x 52.56
	mm	675×620×1335
Net/Gross Weight		lbs 127.43/151.68

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTF250D22UMT
Refrigerant		R454B
Refrigerant Oil Charge(mL)		670
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2236.7
Outdoor Noise Level (dBA)		61
Dimension (W×D×H)	inch	37.24 x 16.14 x 31.89
	mm	946.0×410.0×810.0
Package (W×D×H)	inch	42.91 x 19.68 x 34.84
	mm	1090×500×885
Net/Gross Weight		lbs 142.86/154.54

EFFICIENCY

Cooling		Heating	
SEER2	17	HSPF2-4	8.7
EER2	11	COP	3.6

PERFORMANCE of Cooling

Cooling (Btu/hr)		
Rated Capacity		30000
Min/Max Capacity		9200~34000
Moisture Removal(L/h)		3.53
Standard Operating Range(°F/°C)		-13~122(-25~50)
Conditions:		Indoor: 80°F DB/67°F WB
		Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)		
1. @ 47°F Rated		30000
1. @ 47°F Min/Max Capacity		8500~33000
2. @ 17°F Rated		19400
3. @ 5°F Rated: Capacity / COP		20400/2.1
3. @ 5°F Max: Capacity		20400
Standard Operating Range(*F/°C)		-13~75(-25~24)
1. Conditions:		Indoor: 70°F DB/60°F WB
		Outdoor: 47°F DB/43°F WB
2. Conditions:		Indoor: 70°F DB/60°F WB
		Outdoor: 17°F DB/15°F WB
3. Conditions		Indoor: 70°F DB/60°F WB
		Outdoor: 5°F DB/5°F WB

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	28
Connection Wiring	AWG 14-4
System MOCP	30
Compressor RLA	17.5
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	4.5
Indoor Fan Motor W	375
System Power Input @ Cooling (W)	2730(300 ~ 3400)
System Power Input @ Heating (W)	2440(370 ~2700)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Capillary
Liquid Size	9.52mm(3/8in)
Gas Size	15.9mm(5/8in)
Max. Piping Length(ft/m)	164(50)
Max. Height Difference(ft/m)	82(25)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	84.66(2.4)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Features


- Multi-position installation: horizontal(left or right), vertical(up or down)
- Aluminum Coil
- Constantly Air Flow system up to 0.80 In.W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency(optional)
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Wireless remote controller
 - Third-Party 24V Thermostat
- High efficiency up to 19.7 SEER2, 12.1 EER2, 9.8 HSPF2
- Chassis heater and crankcase heater equipped as standard

Indoor Unit Dimension

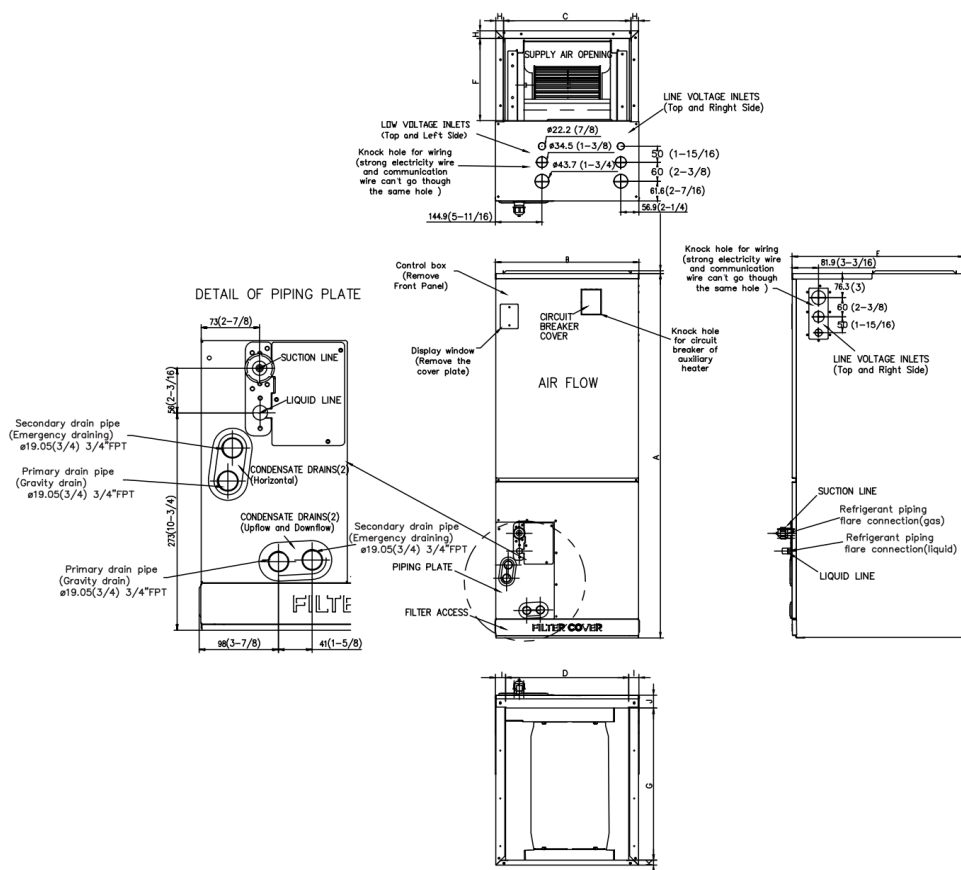


Dimensions	Model	18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19

Outdoor Unit Dimension

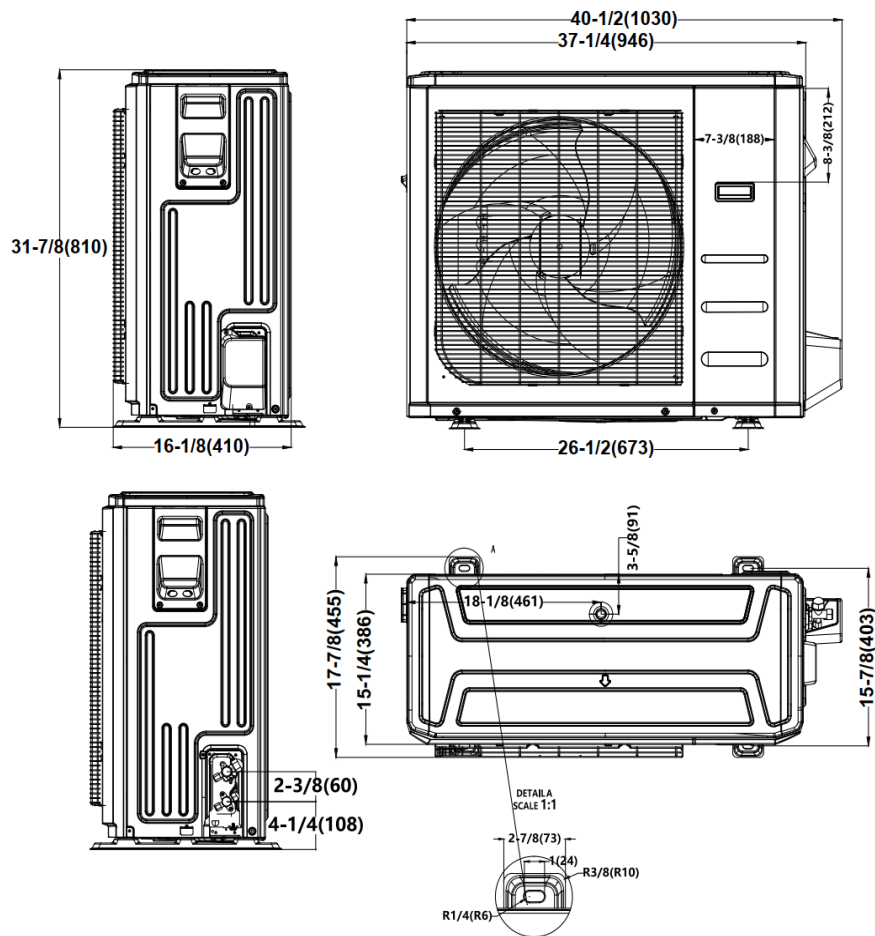

Installation Instruction

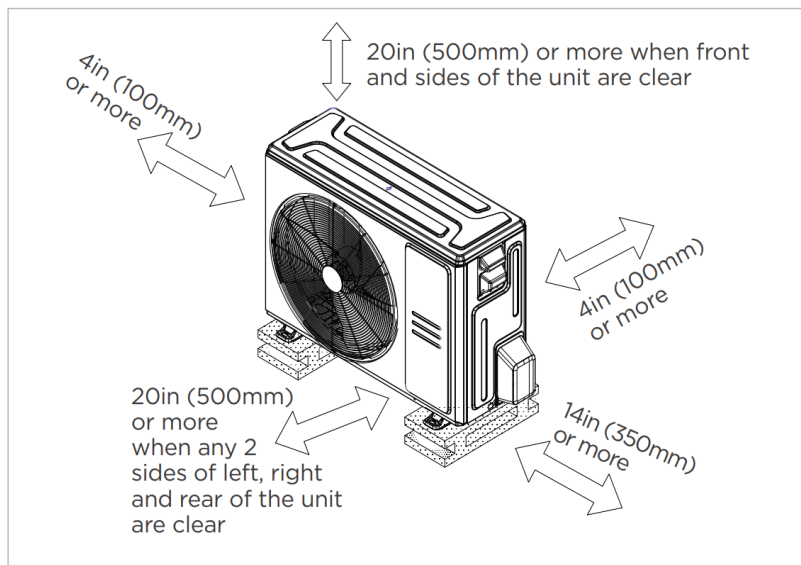

Meets all spatial requirements shown in Installation

- ☒ Meets all spatial requirements shown in installation Clearance Requirements above.

Fan Performance For Indoor Unit

