

SUBMITTAL DATA SHEET



Series Name: Ceiling&Floor Hyper Heat Series
Model Number: FC48H525ZMI/CS248H525ZMO

Ceiling&Floor Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPEINDOOR SPECIFICATIONCIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	1353.8 / 1236.1 / 1083.0 / 800.5 / 665.1
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	54/53/48.5/39/35
Dimension (W×D×H)	inch 64.96 x 26.57 x 9.25
	mm 1650.0×675.0×235.0
Package (W×D×H)	inch 67.91 x 29.72 x 12.52
	mm 1725×755×318
Net/Gross Weight	lbs 89.07/105.16
	kg 40.4/47.7

OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	EKPQ420D1UMUA
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1460
Refrigerant Oil	#REF!
Outdoor Air Flow (Max) (CFM)	4237.9
Outdoor Noise Level (dBA)	64.5
Dimension (W×D×H)	inch 37.48 x 16.34 x 52.48
	mm 952.0×415.0×1333.0
Package (W×D×H)	inch 43.11 x 19.49 x 57.48
	mm 1095×495×1460
Net/Gross Weight	lbs 208.78/239.86
	kg 94.7/108.8

EFFICIENCY

Cooling	Heating
SEER2 18.5	HSPF2-4 10.1
EER2 9.4	COP 2.86

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	48000
Min/Max Capacity	6700~53500
Moisture Removal(L/h)	6.32
Standard Operating Range(*F/*C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	52000
1. @ 47°F Min/Max Capacity	18800~58700
2. @ 17°F Rated	38500
3. @ 5°F Rated: Capacity / COP	47000/1.83
3. @ 5°F Max: Capacity	47000
Standard Operating Range(*F/*C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	44.00
Connection Wiring	14#x3
System MOCP	45
Compressor RLA	27.0
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	5106(730 ~ 5760)
System Power Input @ Heating (W)	5330(1145 ~5900)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246.00(75)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	126.99(3.60)
Additional Charge of Refrigerant(oz/ft)(g/m)	0.32(30)
Connection Method	Flared

FEATURES


- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- "88" display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(bv using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

Indoor Unit Dimension

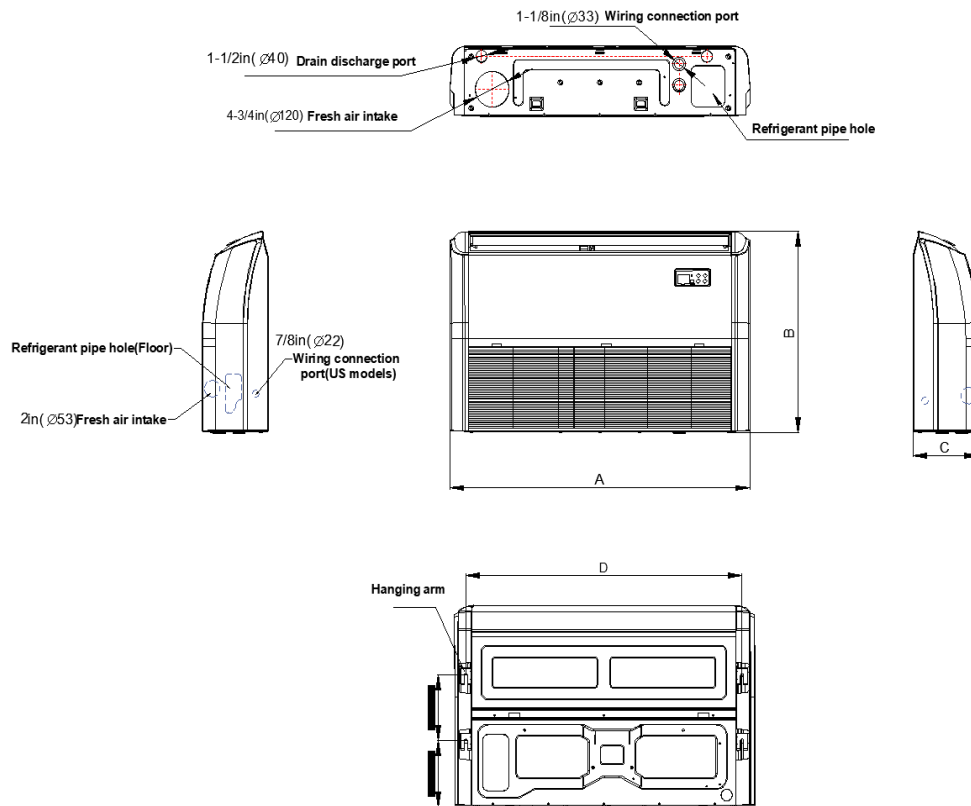


Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

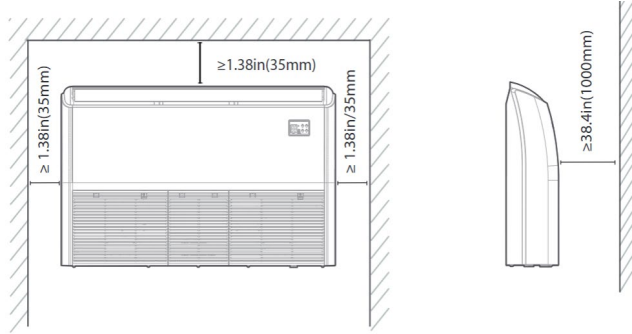


Outdoor Unit Dimension

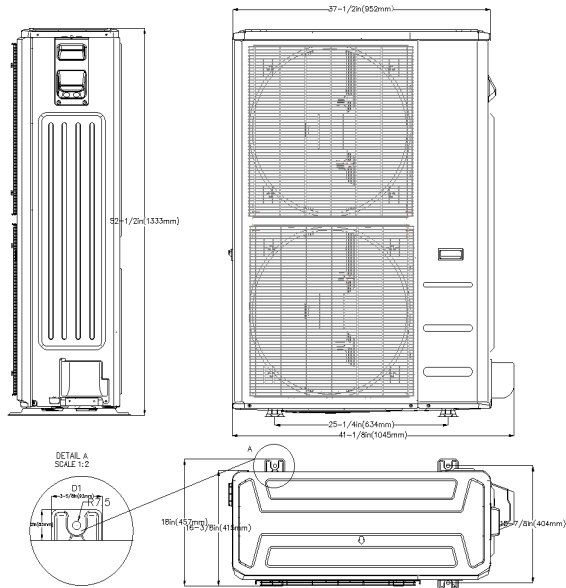

Installation Instruction

REQUIRED CLEARANCE

*1 20in. (500mm) or more when front and sides of the unit are clear

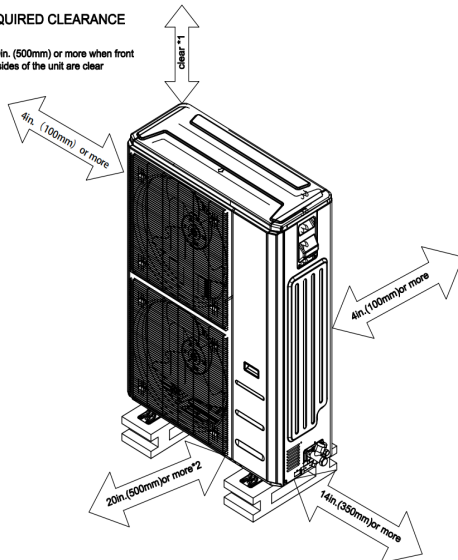

*2 When any 2 sides of left, right and rear of the unit are clear