

# Submittal Data

## SHE9H4ZIGB



Job Name \_\_\_\_\_ Location \_\_\_\_\_

Purchaser \_\_\_\_\_

Engineer \_\_\_\_\_

Submitted to \_\_\_\_\_ For: Reference \_\_\_\_\_ Approval \_\_\_\_\_ Construction \_\_\_\_\_

Submitted By \_\_\_\_\_

### Capacities

Rated BTU cool/Heat	9000/9800 Btu/h
BTU/h min/max (Cooling)	3100/9600 Btu/h
BTU/h min/max (Heating)	2200/11000 Btu/h
Cooling Operating Range	14°F to 118°F
Heat Operating Range	5°F to 81°F
Dehumidifying volume	1.69 Pts./Hr.
Fan Motor speeds (cooling)	1260/1100/950/750
Fan Motor Speeds (heating)	1320/1200/1100/950
Sound Pressure Level (Db/a)	42/38/35/32
Sound Power Level (Db/a)	52/48/45/42
Setting Range	61° to 86°F

Seer Rating, C.O.P., EER, and HSPF ratings are based on the outdoor unit specifications. Ratings are based on 208-230 VAC.

### Electrical

Rated Voltage	208-230 VAC/1ph/60HZ
Fan Motor Output	20 Watts
Fan Motor (RLA)	1 amps
Cabling (4 conductor)	14 AWG stranded
Fuse (on control board)	3.15 amps
Control Type	IR remote or wall mounted control.

Voltage to the indoor unit is supplied via the 4 conductor cable as above. Wall mounted control MSWCH is optional.

### Physical

Lineset (liquid/suction)	1 /4 " X 3/8"
Unit Dimensions (WxDxH)	33.3" X 7.1" X 10.8"
Package Dimensions (WxDxH)	36.1" X 10.2" x 14.6"
Weight (Gross/Net) Lbs.	25.4/21

Model	Product Code
SHE9H4ZIGB	243-2007-E

### Features:

- 1 Yr. parts warranty
- Inverter Technology
- R-410A refrigerant
- Auto, Cool, Heat, and Dry modes
- Auto Louver (up and down)
- Particulate Filter
- Auto Changeover
- Wireless Remote (wall mounted control opt.)
- Timer/Clock
- Auto Restart
- Sleep Mode
- Purge function
- Illuminated display (on/Off)

For Multi-Zone Systems to be connected to the following units only.

SMZ18H46ZOGX	SMZ30H46ZOGX	SMZ42H46ZOGX
SMZ24H46ZOGX		

### Recommended Options

Lineset	CTK143825 or CTK143850
Installation Kit	AK25 or AK50
Wall mounted control	MSWCH

### Notes:

- AHRI registration numbers are based on outdoor unit.
- Condensate pump power is NOT to be connected to the indoor unit. Condensate pump power must be obtained from outdoor unit or a separate power source.
- This unit can be used as a single indoor unit when connected to a SMZ18H46ZOGX only.
- Technical Support: (215)750-9876 or (704)504-8590
- Website: WWW.IRProducts.biz



CONFORMS TO  
ULSTD.1995  
CERTIFIED TO  
CSA STD.C22.2  
NO.236



# Submittal Data


## SHE9H4ZIGB



### OUTLINE AND DIMENSIONS

#### INDOOR DIMENSIONS

W 33.3"	H 10.8"	D 7.1"
---------	---------	--------

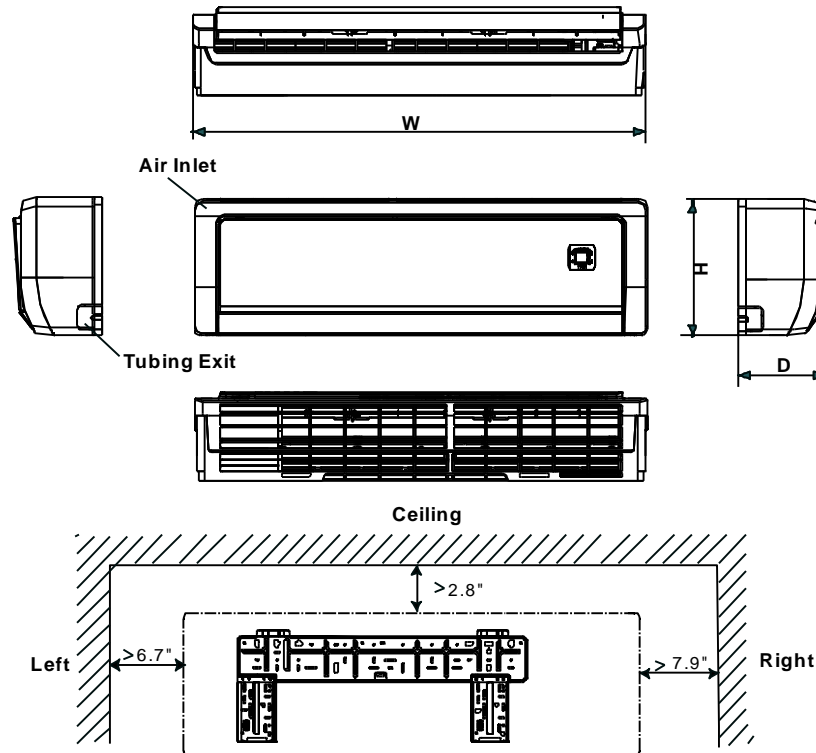

### WARRANTY

INTERNATIONAL REFRIGERATION PRODUCTS warrants the accompanying split air conditioner or heat pump system to be free of defects in material and workmanship for the applications specified in the operation manual and installation manual for a period of one (1) year on parts and five (5) years on compressor, valid from the date of original retail purchase in the United States or Canada. Labor is not covered under warranty.

If the unit exhibits a defect in normal use and is determined to be within the warranty period, INTERNATIONAL REFRIGERATION PRODUCTS will, at its discretion, either repair or replace the unit free of charge within a reasonable time after the unit is returned. This warranty DOES NOT cover:

- Damage, accidental or otherwise, to the unit while in possession of the consumer that is not a result of a defect in material or workmanship.
- Damage caused by consumer misuse, tampering, or failure to follow all care and maintenance instructions in the manuals.
- Damage to the finish of the case or other parts caused by water.
- Damage caused by repairs or alterations to the unit by anyone other than a qualified technician.
- Filter.
- Freight and Insurance cost for the warranty service