




Job Name:	Location:
Purchaser:	
Engineer:	
Submitted to:	For: Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction <input type="checkbox"/>
Submitted By:	

Multi-Zone Condenser Assembly

Rated BTU Cooling / Heating	28,400 / 30,000
Voltage/Freq./Phase	208-230/60/1
Min. Circuit Ampacity	20
Breaker Size	30
BTU/h Cooling	8,189-33,438
BTU/h heating	8,189-32,414
AHRI Certification #	10349249
S.E.E.R Rating	21
EER Rating	3.66 / 12.5
COP (w/w-h)	3.74 / 12.76
HSPF (region IV-US)	10.5
Operating Range Min/Max cooling	-0.4°F to 118°F
Operating Range Min/Max heating	-4°F to 86°F
Dimensions –approx. (W/H/D)	38.6”/29.45”/16.81”
Weight (net)/(gross)	154.3 / 169.8 Lbs.
Sound Power Level db(a)	69
Interconnection Identification	N(1)-2-3
Supply connection Identification	L1-L2-G
Line connection (Suction)	3/8”
Line connection (liquid)	1/4”
Metering Method	EXV
Air Circulation (Cf/m)	2,354
Refrigerant/ Precharge	R410a/98.76 oz.
Compressor Type	Rotary
Note: Data based on 230VAC	

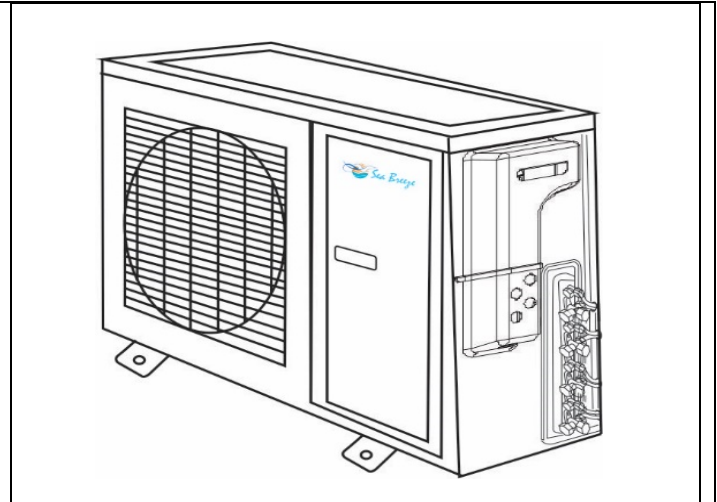

Standard Features

5 Year compressor warranty	Auto restart/reset
1 Year parts warranty	R-410a Refrigerant
Installation Information:	
Supply Power Wire: Per Local Codes	
Interconnect Cable: 16-4 stranded	
Outdoor Mounting bracket: BR-440L (optional)	

WARRANTY


International Refrigeration Products warrants the accompanying split air conditioner or heat pump system to be free of defects in material and workmanship for the applications specified in the operation manual and installation manual for a period of one (1) year on parts and five (5) years on compressor, valid from the date of original retail purchase in the United States or Canada. **Labor or shipping is not covered under this warranty.**





CONFORMS TO
UL STD. 1995
CERTIFIED TO
CSA STD. C22.2
NO. 236

AHRI Registration Number: 10349249

OUTLINE AND DIMENSIONS

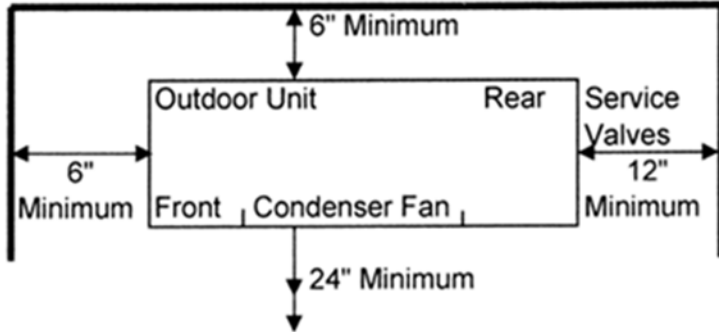

Install the Outdoor unit on a Condenser Pad or if a Heat Pump use feet to raise unit up approx 6" to allow for defrost to drain away

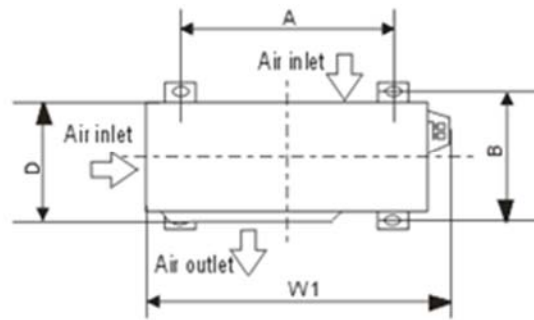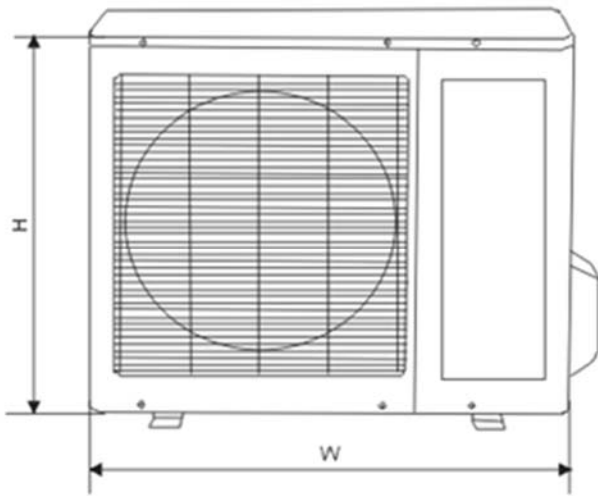

W	D	H	W1	A	B
38.58"	14.5"	31.11"	38.58"	22"	14.5"