

# SUBMITTAL DATA SHEET



Series Name: Wall Mount Single Zone  
Model Number: SZ36H525ZMO / WM36H525ZMI

## High Wall Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



## INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	882.9 / 635.7 / 506.2 / 382.6 / 323.7	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	N/A/49/43.5/34.5/31.5	
Dimension (W×D×H)	inch	47.13 x 11.02 x 14.61
Package (W×D×H)	inch	50.39x14.17x17.91
Net/Gross Weight	lbs	43.21/54.67

## OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTF250D22UMT	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	670	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	2235.3	
Outdoor Noise Level (dBA)	63.0	
Dimension (W×D×H)	inch	37.24 x 16.14 x 31.89
Package (W×D×H)	inch	42.91 x 19.68 x 34.84
Net/Gross Weight	lbs	150.35/160.27

## EFFICIENCY

Cooling		Heating	
SEER2	19.0	HSPF2-4	8.5
EER2	8.6	COP	2.85

## PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	36000
Min/Max Capacity	6600~36800
Moisture Removal(L/h)	4.6
Standard Operating Range(°F/°C)	-13~122(-25~50)
Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

## PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	36000
1. @ 47°F Min/Max Capacity	9600~38000
2. @ 17°F Rated	24200
3. @ 5°F Rated: Capacity / COP	22000/1.90
3. @ 5°F Max: Capacity	22000
Standard Operating Range(°F/°C)	-13~75(-25~24)
1. Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB
	Outdoor: 5°F DB/5°F WB

## ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	33.0
Connection Wiring	14#x4
System MOCP	35
Compressor RLA	21.5
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	4138(735 ~ 4390)
System Power Input @ Heating (W)	3700(675 ~4700)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


## PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	15.9mm(5/8in)
Max. Piping Length(ft/m)	213.20(65)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/g)	112.88(3.2)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared


## Features

- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
  - Two way communication wired controller:120N(X6)
  - Two way communication wired controller with built-in WiFi:120N(X6W)
  - Infrared wired controller: 120L
  - Wireless remote controller
  - Third-Party 24V Thermostat\*


## Installation Instruction

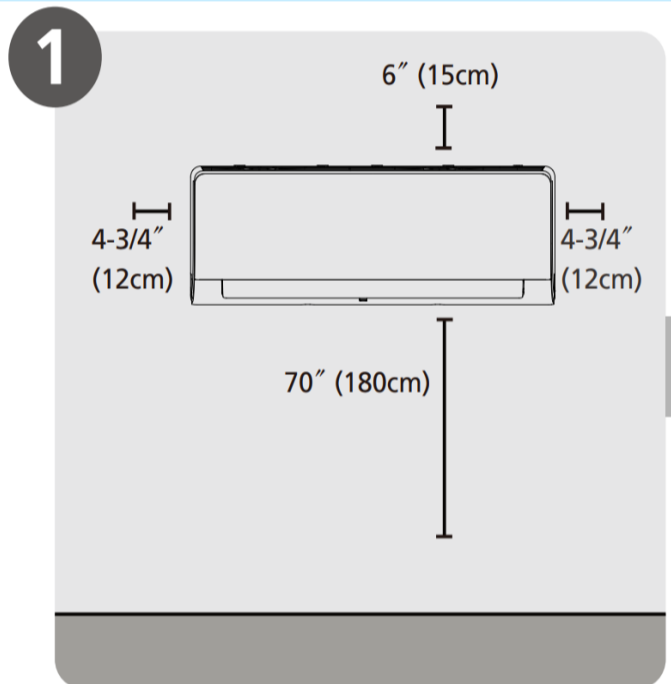

### Select Installation Location

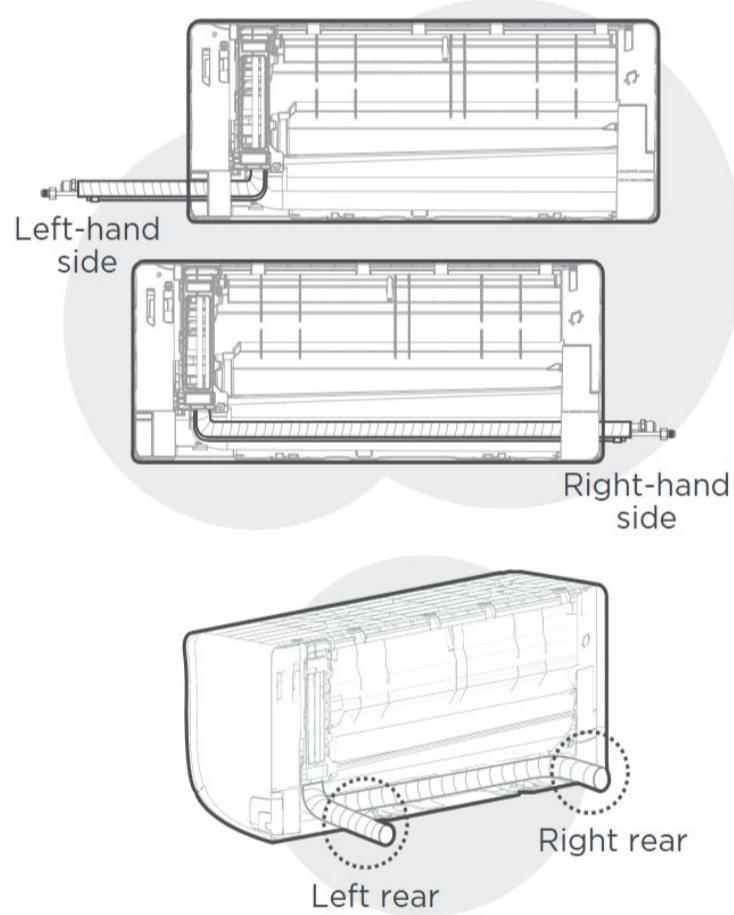


**NOTE:**  
Based on the position of the wall hole relative to the mounting plate, choose the side from which the piping will exit the unit. You have four options for the exit direction of the piping.

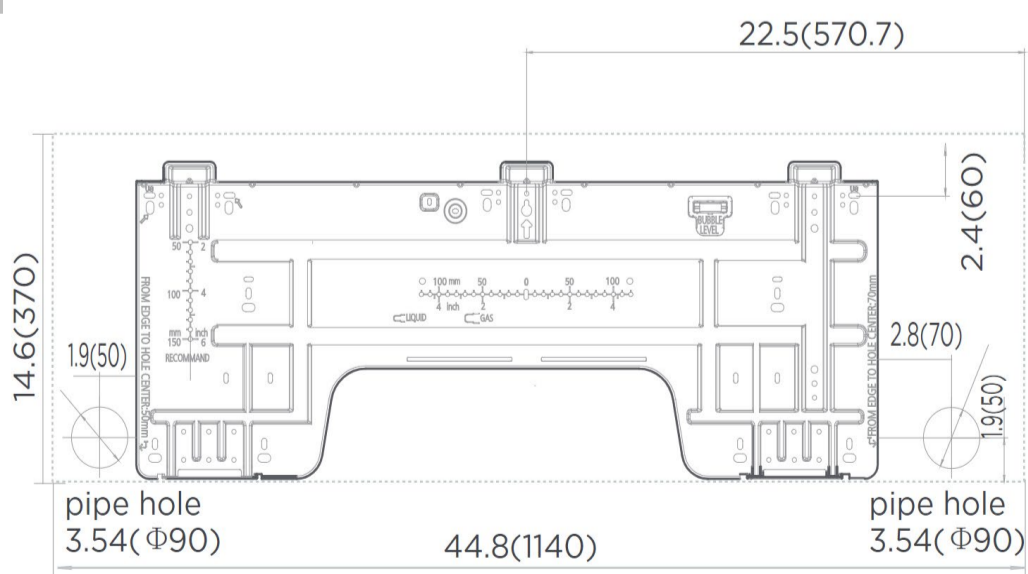


**NOTE:**  
When the gas side connective pipe is  $\Phi$  (5/8in)16mm or more, the wall hole should be (3-1/2in)90mm.

## Outdoor Unit Dimension

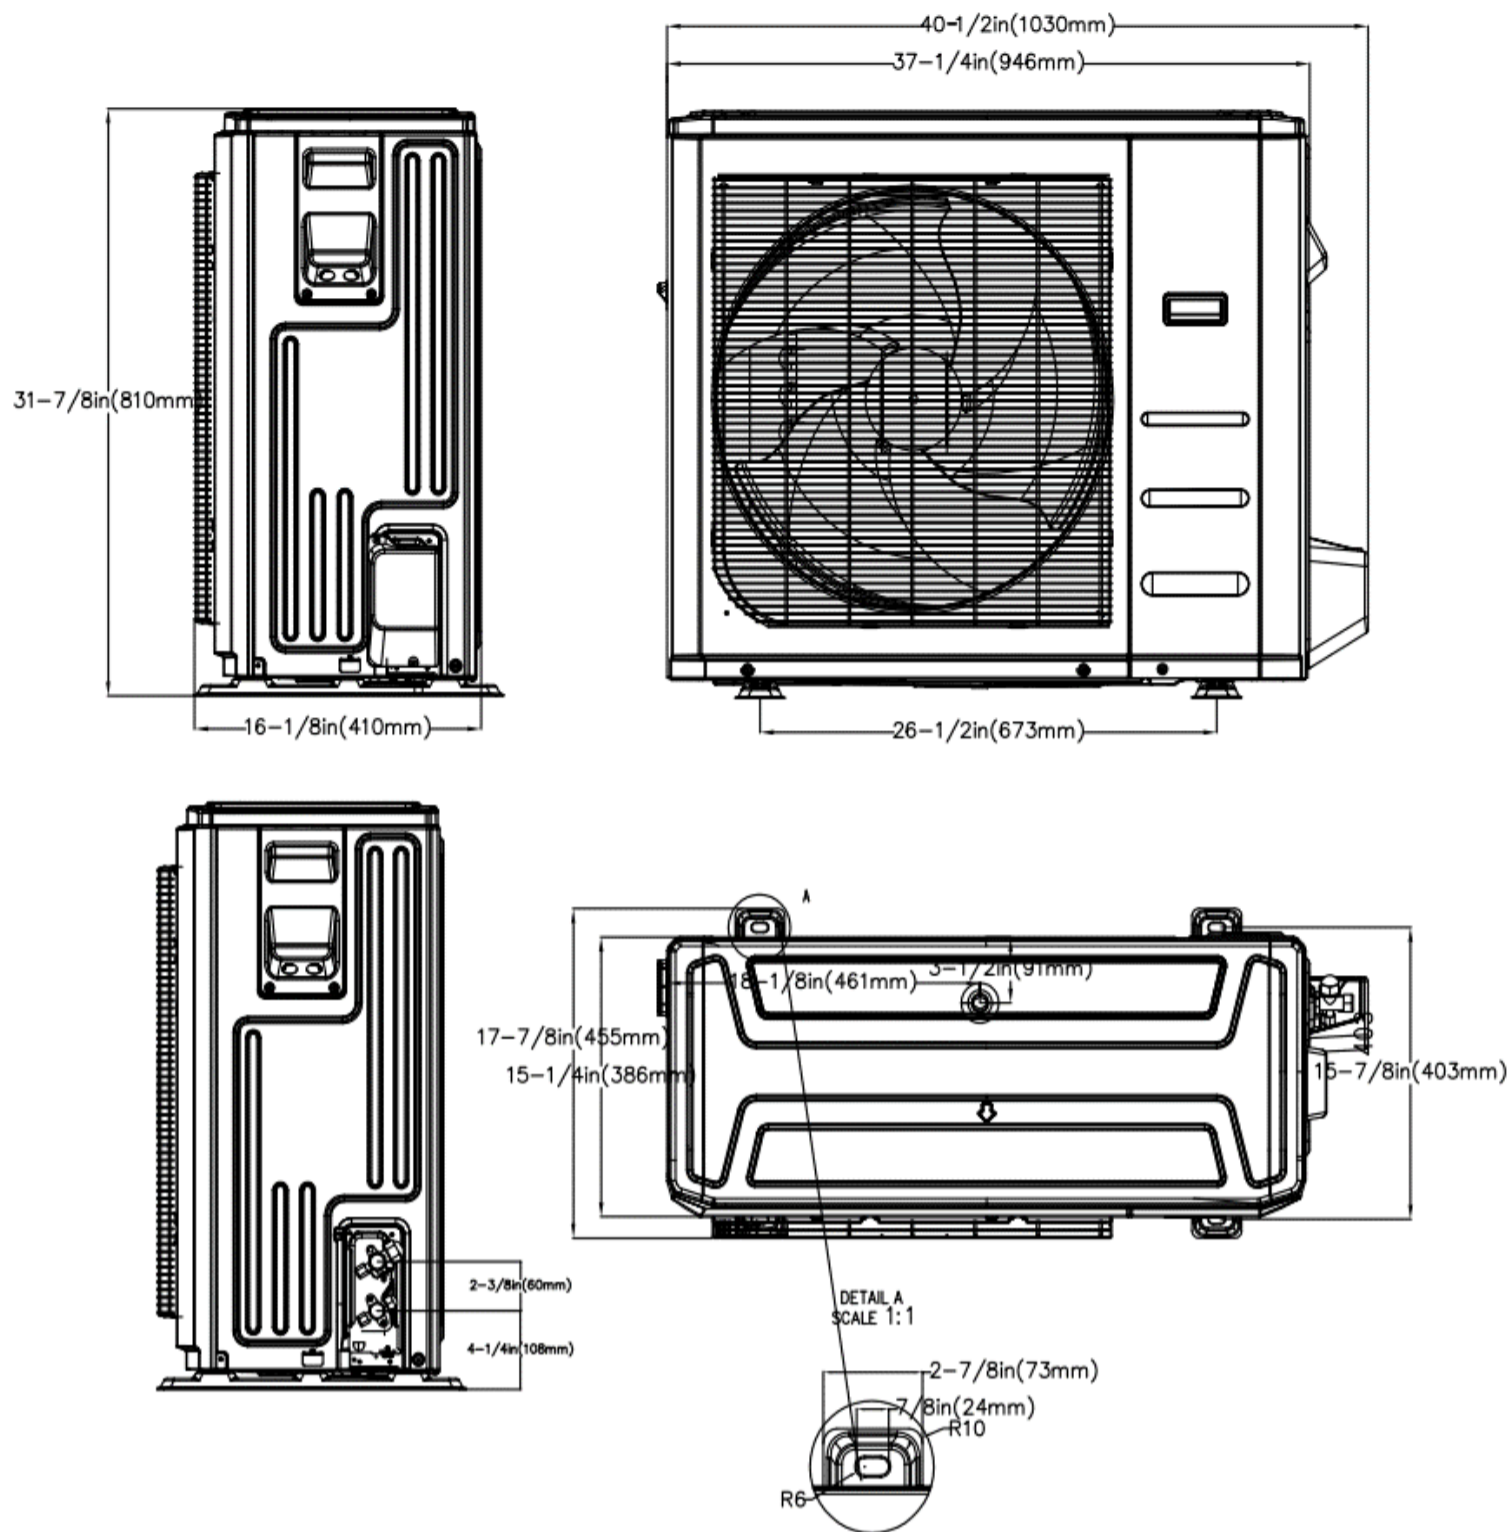

### Installation Instruction

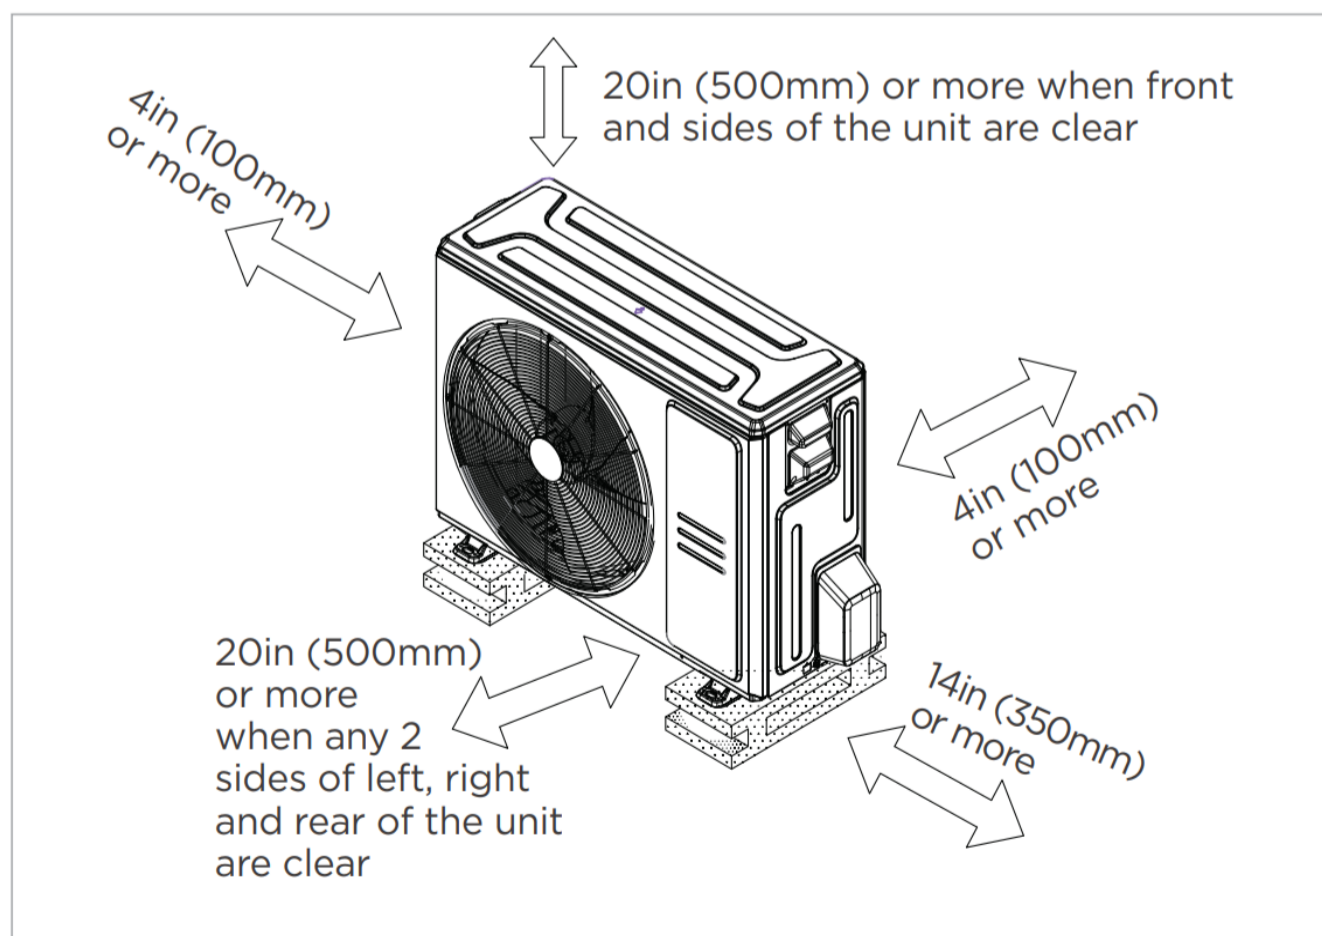

Meets all spatial requirements shown in Installation Clearance Requirements above.